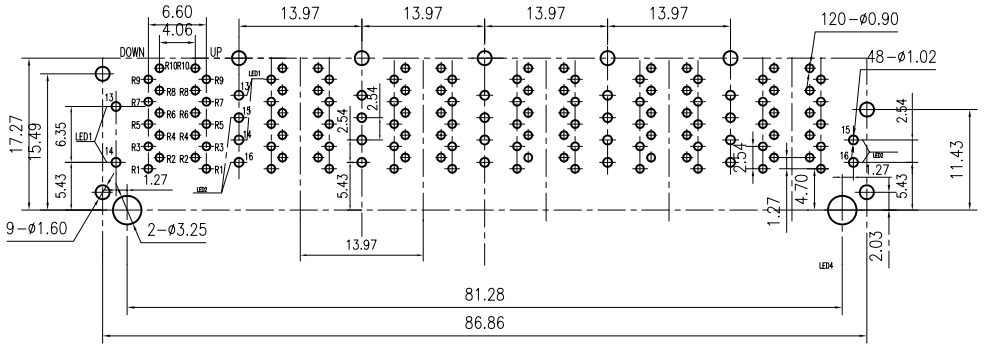

PCB BOARD LAYOUT

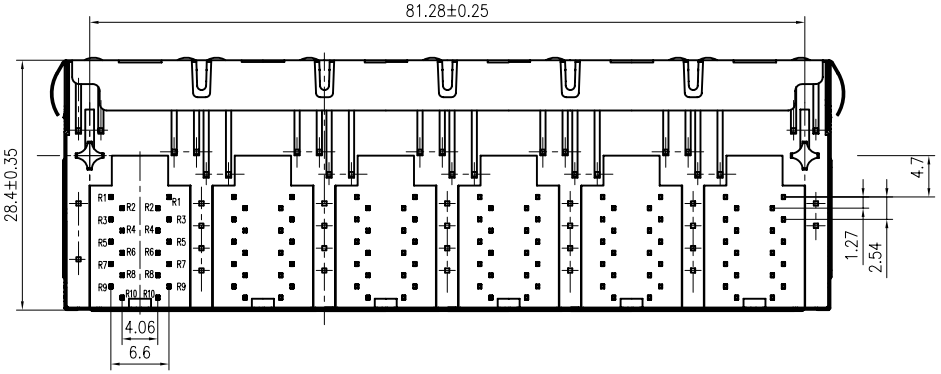

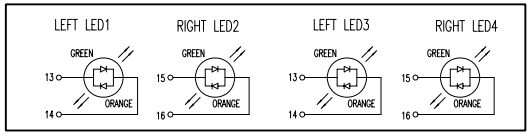

Comply with RoHS

B TOP

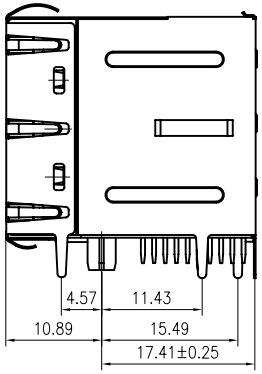

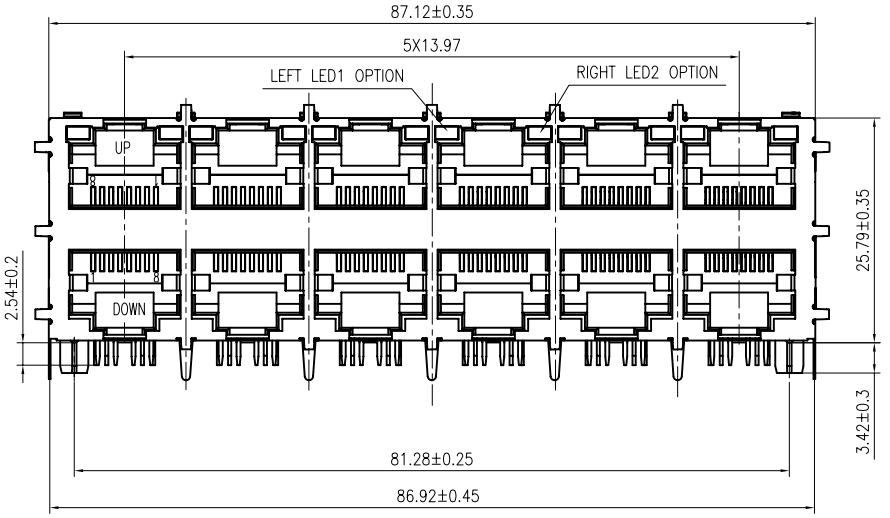

LED Specification

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560-580 nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610 nm	2.5V	2.1-2.2V	9-30 MCD
Orange	580-610 nm	2.5V	2.1-2.2V	50-100 MCD

1. LED intensity/wavelength measured with Photo Research PR-650 Colormeter
2. With a forward current of 20 mA,Absolute Maximum Ratings (Ta=25℃)

1:TOLERANCES UNLESS OTHERWISE SPECIFIED :
0~10±0.15、10~20±0.2、20~40±0.25、
40~70±0.3、≥70±0.4
2:JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS,PART 68 SUBPART F.

B-TOP ® 东莞博腾电子科技有限公司
Dongguan BroadTop Electronic Technology Co., Ltd.
TEL: 0769-38926198
FAX: 0769-38926199
Website www.BtopTech.cn
www.BtopTech.com

Designed		MATERIAL			DESCRIPTION	B59(168-01)W-6725-C12(2X6 GO-GO 中间LED EMI)	
Checked							
Approved		SCALE	1.2:1	UNIT mm	MODEL NO.		REV. V1.0

FIRST ANGLE PROJECTION