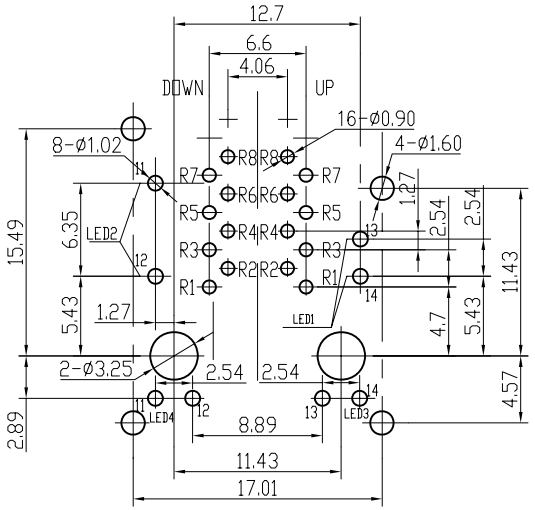

PCB BOARD LAYOUT

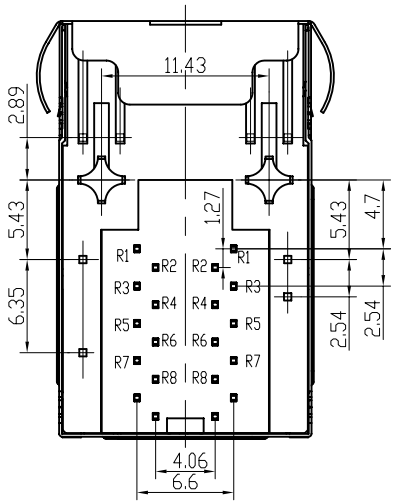

连 线 关 系

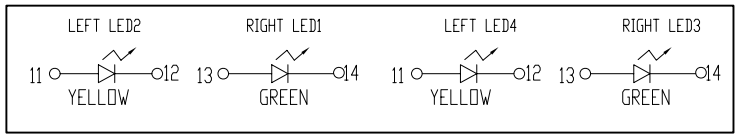

LED Specification

Standard LED Color	LED Wavelength	Forward (V MAX)	Typical (V TYP)	Luminous Intensity
Green	560-580 nm	2.5V	2.1-2.2V	9-25 MCD
Yellow	580-610 nm	2.5V	2.1-2.2V	9-30 MCD
Orange	580-610 nm	2.5V	2.1-2.2V	50-100 MCD

1. LED intensity/wavelength measured with Photo Research PR-650 Colormeter
2. With a forward current of 20 mA,Absolute Maximum Ratings (Ta=25℃)

Specification:

1:TOLERANCES UNLESS OTHERWISE SPECIFIED :
0~10±0.15、10~20±0.2、20~40±0.25、
40~70±0.3、≥70±0.4

2:JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS,PART 68 SUBPART F.

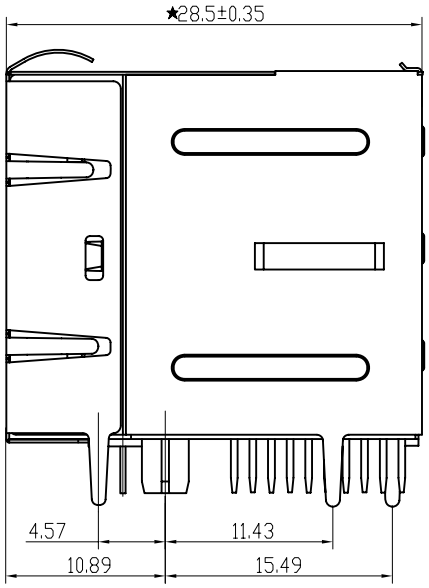

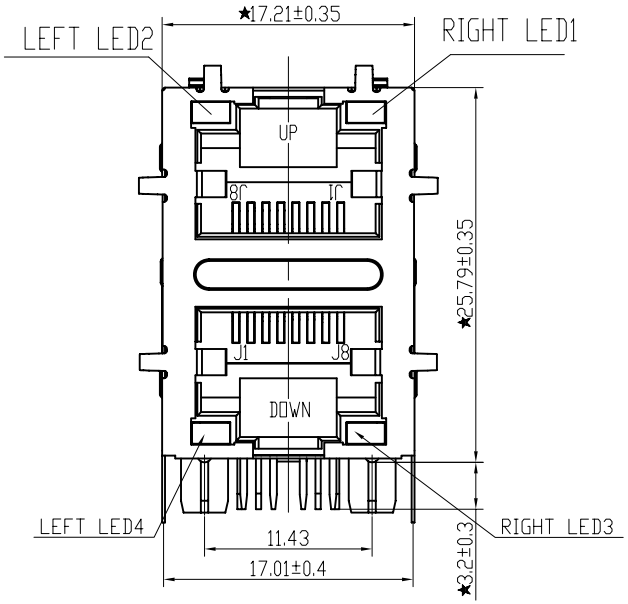

B-TOP® 东莞博腾电子科技有限公司 Dongguan BroadTop Electronic Technology Co., Ltd.	Designed		MATERIAL		DESCRIPTION	B59(48-27)W-1123-C12(2X1 EMI Y-G 中间LED)	
FIRST ANGLE PROJECTION	Checked						
TEL: 0769-38926198 FAX: 0769-38926199 Website www.BtopTech.cn www.BtopTech.com	Approved		SCALE	2:1	UNIT mm	MODEL NO.	REV. V1.1

20161221